


MRad1 RD

RD illuminated.

Meopta's MRad 1 reticle provides long-range hunters and shooters with the ultimate in reticle features. Wind hold-offs on the vertical crosshair are graduated in 0.2 MIL steps allowing for precise aiming in full or partial value cross winds. MIL based and only available in Optika6 FFP riflescopes with MIL adjustments, the MRad 1 RD reticle provides consistent range estimating and ballistic compensation throughout the entire power range.

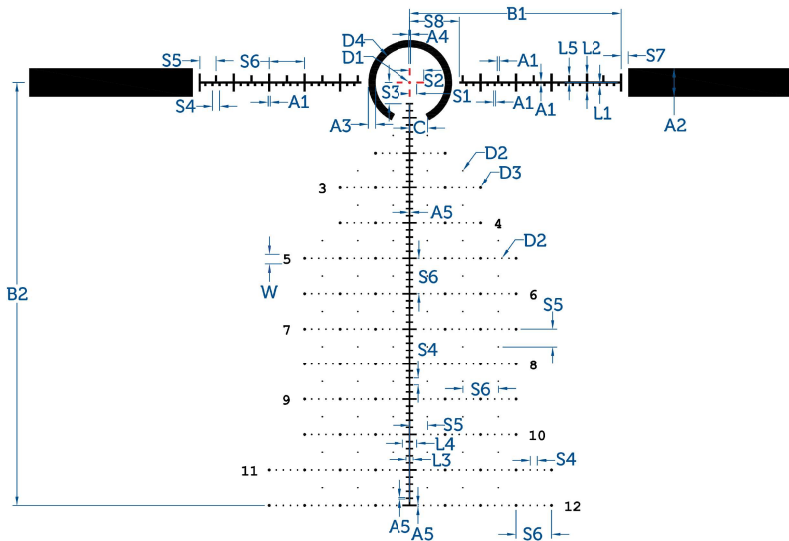

MeoPro Optika6 3-18x50 RD FFP
MeoPro Optika6 3-18x56 RD FFP

	Dimensions				
	cm/100m	in/100yd	MOA	mRad	Power
A1	0,6	0,22	0,21	0,06	
A2	8,0	2,88	2,75	0,80	
A3,L3, L5,S1, S4,S7	2,0	0,72	0,69	0,20	
A4	0,5	0,18	0,17	0,05	
A5,D2	0,4	0,14	0,14	0,04	
B1	60,0	21,60	20,63	6,00	
B2	120,0	43,20	41,25	12,00	
D1,D3	0,8	0,29	0,28	0,08	
D4	20,0	7,20	6,88	2,00	
L1	1,0	0,36	0,34	0,10	
L2,S5, C	5,0	1,80	1,72	0,50	
L4,S2	4,0	1,44	1,38	0,40	
S3	6,0	2,16	2,06	0,60	
S6	10,0	3,60	3,44	1,00	
S8	14,0	5,04	4,81	1,40	
W	2,5	0,90	0,86	0,25	

MeoPro Optika6 4,5-27x50 RD FFP

	Dimensions				
	cm/100m	in/100yd	MOA	mRad	Power
A1	0,6	0,22	0,21	0,06	
A2	8,0	2,88	2,75	0,80	
A3,L3, L5,S1, S4,S7	2,0	0,72	0,69	0,20	
A4,A5, D2	0,4	0,14	0,14	0,04	
B1	60,0	21,60	20,63	6,00	
B2	120,0	43,20	41,25	12,00	
D1,D3	0,8	0,29	0,28	0,08	
D4	20,0	7,20	6,88	2,00	
L1	1,0	0,36	0,34	0,10	
L2,S5, C	5,0	1,80	1,72	0,50	
L4,S2	4,0	1,44	1,38	0,40	
S3	6,0	2,16	2,06	0,60	
S6	10,0	3,60	3,44	1,00	
S8	14,0	5,04	4,81	1,40	
W	2,5	0,90	0,86	0,25	